


REV	Content of Amendment	Update

RoHS

Fiber Optical Patch Cord,LC-ST,MM 62.5 Duplex,PVC or LSZH,OD=2.0x4.1 or 2.8x5.7(mm)

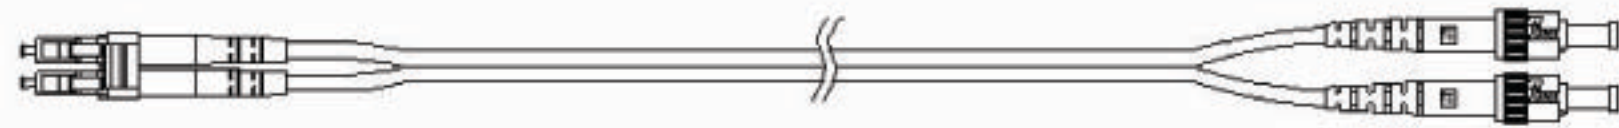

- ①
- ②
- ③
- ④

Features

Standard: Telcordia GR-326-CORE
 PC polishing
 Multi monde fiber, ITU-TG.651
 Standard housing, ceramic ferrule
 Cable diameter: 2.0x4.1 or 2.8x5.7(mm)
 Fiber type: 62.5/125μm
 Insertion loss: MM Less than 0.3dB
 Return loss: PC MM larger than 35dB
 Repeatability: Less than 0.2 dB
 Changeability: Less than 0.1 dB
 Operating temperature range: -40°C ~ 80°C
 Storage temperature range: -40°C ~ 80°C
 Tensile strength: 100N
 Min. bending radius: 35mm
 RoHS compliance

No.	Description	Qty
①	T cap	4
②	Clip	1
③	Boot	4
④	Optical Cable	1

UNIT	mm	PN: XXM-LC/ST-MD					
DATE	03/27/12						
DRAW							
CHECK							
APP, D		SCALE	SIZE	A4	PAGE	REV	A