

Product Specification

Category 6 UTP Patch Cable, 24AWG×4P, PVC(without Cross)

STANDARD COMPLIANCES

All Proposed Category 6 requirements as per ANSI/TIA, ISO/IEC, and CENELEC EN Standards:

ANSI/TIA-568-C.2 Cat.6

ISO/IEC 2nd Edition 11801 Class E

CENELEC EN 50173-1

CENELEC EN 50288-6-2, IEC 61156-6 for patch cable

Flame Retardancy is verified according to IEC 60332-1-2.

We implemented RoHS compliance for the requirement of European Union issued Directive 2002/95/EC.

CONSTRUCTION & CHARACTERISTICS

Conductor	Material / Size	Bare Copper / 24AWG
Insulation	Material	HDPE
	Thickness	Nominal: 0.231 mm
	Diameter	Nominal: 1.05 mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min. 300%
	Unaged Tensile Strength	Min. 1.683 Kgf/mm ²
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal: 0.50 mm
	Diameter	Nominal: 5.8 mm
	Color	Assorted upon request
	Unaged Elongation	Min. 100%
	Unaged Tensile Strength	Min. 1.407 Kgf/mm ²
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking	YFC CAT.6 UTP PATCH ETL/3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 24AWGX4P CM(UL) c(UL) E164469-XX or as customer request.	
	(PS): " + " Marked	

APPROVALS

UL/cUL Listed

ETL/3P Certified ANSI/TIA-568-C.2 Category 6 Testing Safety/Performance



Product Specification

APPLICATIONS

1000BASE-TX Gigabit Ethernet
 10BASE-T, 100BASE-TX Fast Ethernet (IEEE 802.3)
 100 VG – AnyLAN (IEEE802.12), 155/622 Mbps ATM

550MHz Broadband Video
 Voice, T1, ISDN


ELECTRICAL PERFORMANCES

Dielectric Strength of Insulation		2500 V dc / 2 seconds		
Insulation Resistance Test		Min. 5000 MΩ·Km		
Conductor Resistance		Max. 9.38 Ω/100m at 20°C		
Resistance Unbalance		Max. 2%		
Capacitance Unbalance		Max. 160 pF/100m		
Mutual Capacitance		Max. 5600 pF/100m		
Impedance	772kHz	125Ω ± 20%		
	1~250MHz	100Ω ± 15%		
Attenuation & Near End Cross Talk	Frequency (MHz)	Max.Attenuation (dB/100 meters)	NEXT (dB), Min.	PSNEXT (dB), Min.
	1 MHz	2.0*	74.3*	72.3*
	4 MHz	3.8*	65.3*	63.3*
	10 MHz	6.0*	59.3*	57.3*
	16 MHz	7.6*	56.2*	54.2*
	20 MHz	8.5*	54.8*	52.8*
	31.25 MHz	10.7*	51.9*	49.9*
	62.5 MHz	15.4*	47.4*	45.4*
	100 MHz	19.8*	44.3*	42.3*
	150 MHz	24.9*	41.4*	39.4*
	200MHz	29.0*	39.8*	37.8*
	250MHz	32.8*	38.3*	36.3*

The asterisked (*) value are for information only. The minimum Next coupling loss for any pair combination at room temperature is to be greater than the value determined using the formula:
 $NEXT(f\text{ MHz}) \geq NEXT(0.772) - 15\text{LOG}_{10}(f\text{ MHz}/0.772)\text{dB}$


CONFIGURATION

orange	2	green	3
white/orange		white/green	
blue	1	brown	4
white/blue		white/brown	

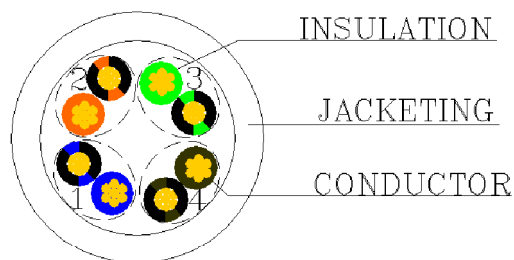


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2014/9/12	Sally	NEW
A/1	2014/9/25	Sally	Change the color(delete pink) Change ASSEMBLE to Non-Boot

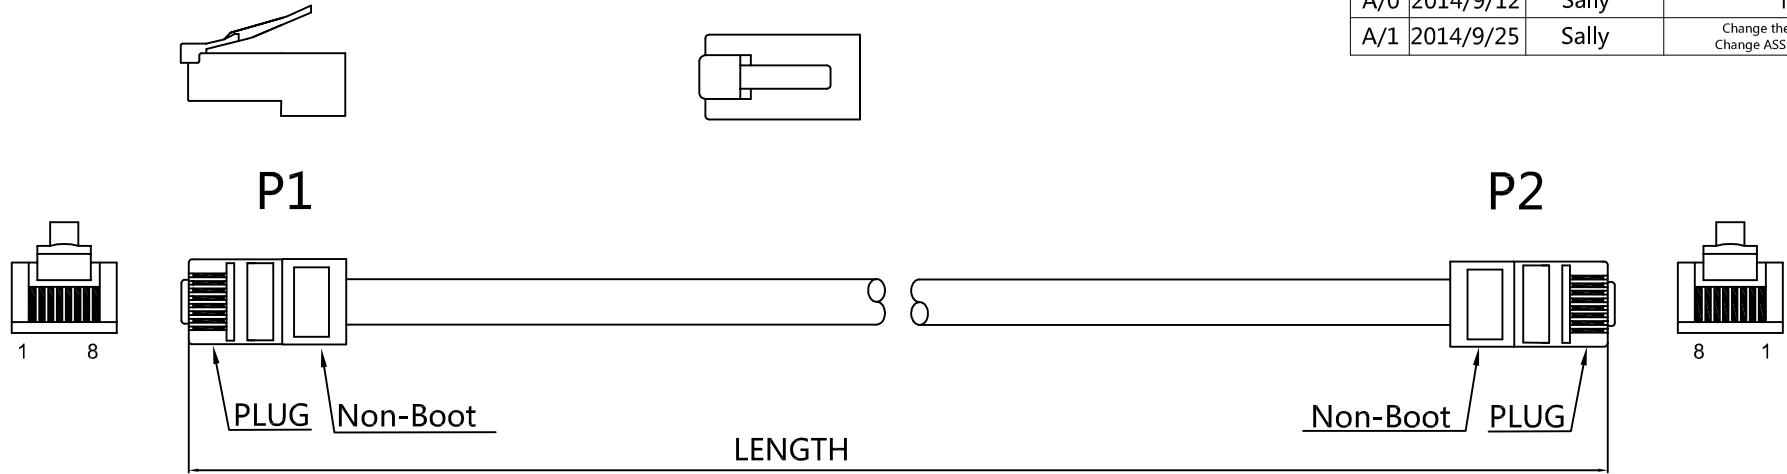

Marking: YFC CAT.6 UTP ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 ETL/3P VERIFIED ▲ 24AWGX4P (FP0555) PATCH TYPE CMX (UL) c(UL) CMH E164469-F3

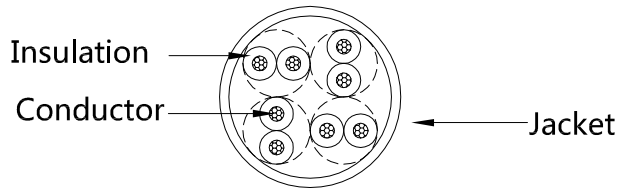

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

Length (Ft)	Tolerance (+/- inch)	Tolerance (%)	Length (Ft)	Tolerance (+/- inch)	Tolerance (%)
0.5	0.6	10.00%	15	3.15	1.75%
1	1.2	10.00%	20	4	1.67%
1.5	1.2	6.67%	25	4	1.33%
2	1.2	5.00%	30	6	1.67%
3	1.2	3.33%	35	6	1.43%
4	1.2	2.50%	40	6	1.25%
5	1.2	2.00%	50	6	1.00%
6	1.2	1.67%	75	6	0.67%
7	2	2.38%	100	6	0.50%
8	2	2.08%	125	6	0.40%
9	2	1.85%	150	6	0.33%
10	2	1.67%	175	6	0.29%
12	2	1.39%	200	6	0.25%

Conductor	Bare Copper 24AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:1.03±0.06mm
Jacket/PVC	Thickness:MIN at any point:0.60mm MAX AVG:0.70mm Diameter:5.8±0.15mm
Wire	CAT.6 UTP 24AWG*4P
Plug	8P8C 50u"
Color	green/black/blue/red/white/grey/ yellow/purple/orange
PAPT NAME	SPECIFICATION DESCRIPTION

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8