


REV	Content of Amendment	Update

RoHS

Fiber Optical Patch Cord, LC-LC, SM Duplex, PVC or LSZH, OD= 2.0x4.1 or 2.8x5.7(mm)

L

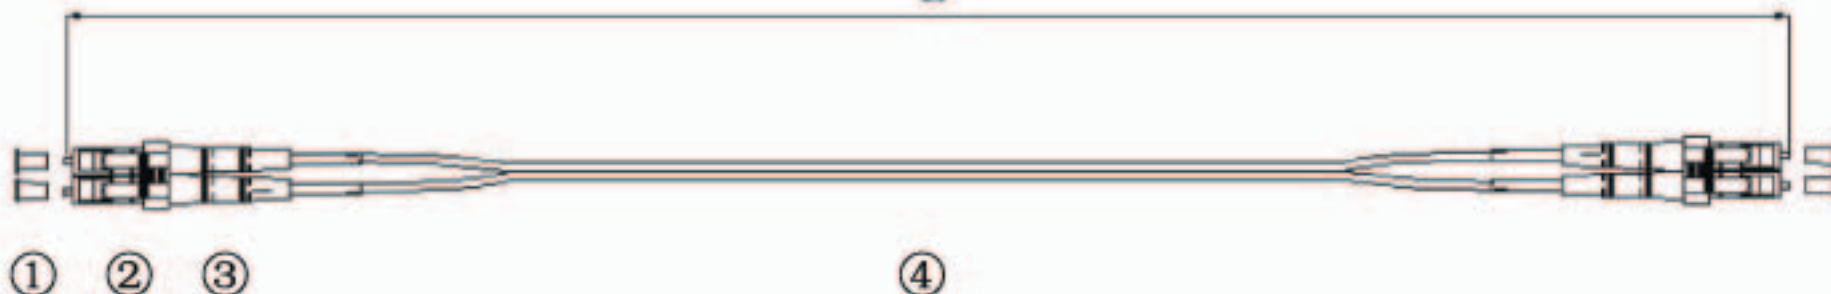

Features

- Standard: Telcordia GR-326-CORE
- UPC or APC polishing
- Single mode fiber: ITU- TG.652, G655, G657
- Standard housing, ceramic ferrule
- Cable diameter: 2.0x4.1 or 2.8x5.7(mm)
- Fiber type: 9/125 μm,
- Insertion loss: SM Less than 0.3dB
- Return loss: UPC SM larger than 55dB
 PC SM larger than 50 dB
 APC SM larger than 60 dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -40°C ~ 80°C
- Storage temperature range: -40°C ~ 80°C
- Tensile strength: 100N
- Min. bending radius: 35mm
- RoHS compliance

No.	Description	Qty
①	T cap	4
②	Clip	2
③	Boot	4
④	Optical Cable	1

UNIT	mm	PN: XXM-LC/LC-SD				
DATE	03/27/12					
DRAW						
CHECK						
APP. D		SOLE	SIZE	A4	PAGE	REV