


REV	Content of Amendment	Update

RoHS

Fiber Optical Patch Cord, ST-ST,MM 62.5 Duplex,PVC or LSZH, OD= 2.0x4.1 or 2.8x5.7(mm)

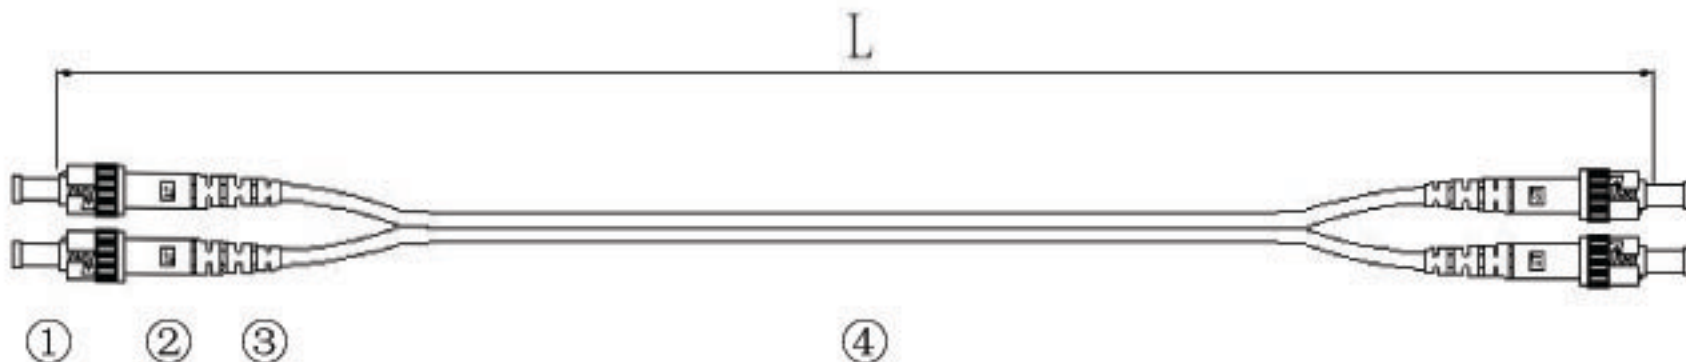

Features

- Standard: Telcordia GR-326-CORE
- PC polishing
- Multi monde fiber, ITU-TG.651
- Standard housing, ceramic ferrule
- Cable diameter: 2.0x4.1 or 2.8x5.7(mm)
- Fiber type: 62.5/125μm
- Insertion loss: MM Less than 0.3dB
- Return loss: PC MM larger than 35dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -40°C ~ 80°C
- Storage temperature range: -40°C ~ 80°C
- Tensile strength: 100N
- Min. bending radius: 35mm
- RoHS compliance

No.	Description	Qty
①	T cap	4
②	Clip	0
③	Boot	4
④	Optical Cable	1

UNIT	mm	PN: XXM-ST/ST-MD			
DATE	03/27/12				
DRAW					
CHECK					
APP, D		SCALE	SIZE	A4	PAGE
					REV
					A