


Fiber Optical Patch Cord, SC-SC,MM 62.5 Duplex, PVC or LSZH, OD=2.0×4.1 or 2.8x5.7(mm)

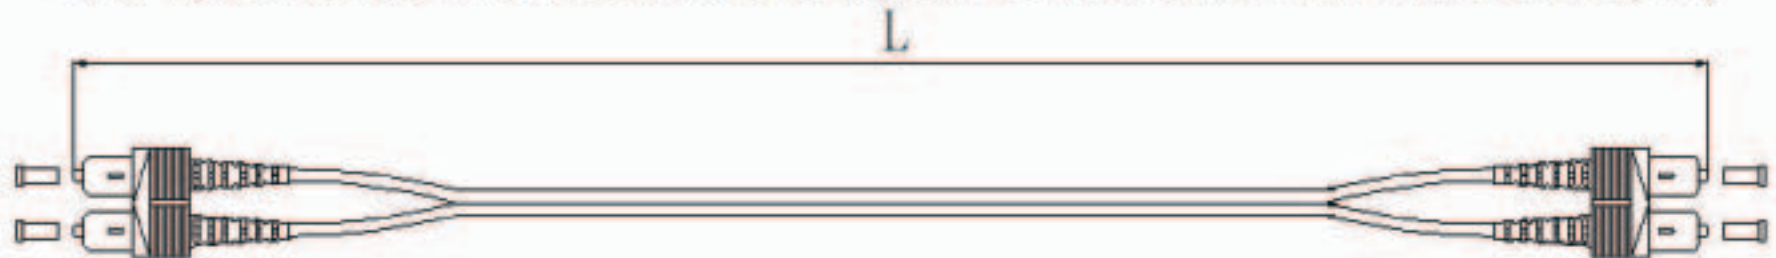

- ①
- ②
- ③
- ④

Features

Standard: Telcordia GR-326-CORE
 PC polishing
 Multi mode fiber, ITU-TG.651
 Standard housing, ceramic ferrule
 Cable diameter: 2.0×4.1 or 2.8x5.7(mm)
 Fiber type: 62.5/125μm
 Insertion loss: MM Less than 0.3dB
 Return loss: PC MM larger than 35dB
 Repeatability: Less than 0.2 dB
 Changeability: Less than 0.1 dB
 Operating temperature range: -40°c ~ 80°c
 Storage temperature range: -40°c ~ 80°c
 Tensile strength: 100N
 Min. bending radius: 35mm
 RoHS compliance

No.	Description	Qty
①	T cap	4
②	Clip	2
③	Boot	4
④	Optical Cable	1

UNIT	mm	PN: XXM-SC/SC-MD					
DATE	03/27/12						
DRAW							
CHECK							
APP. D		SOLE	SIZE	A4	PAGE	REV	A