


| REV | Content of Amendment | Update |
|-----|----------------------|--------|
| | | |

RoHS

Fiber Optical Patch Cord, LC-LC,MM 62.5 Duplex,PVC or LSZH, OD= 2.0x4.1 or 2.8x5.7(mm)

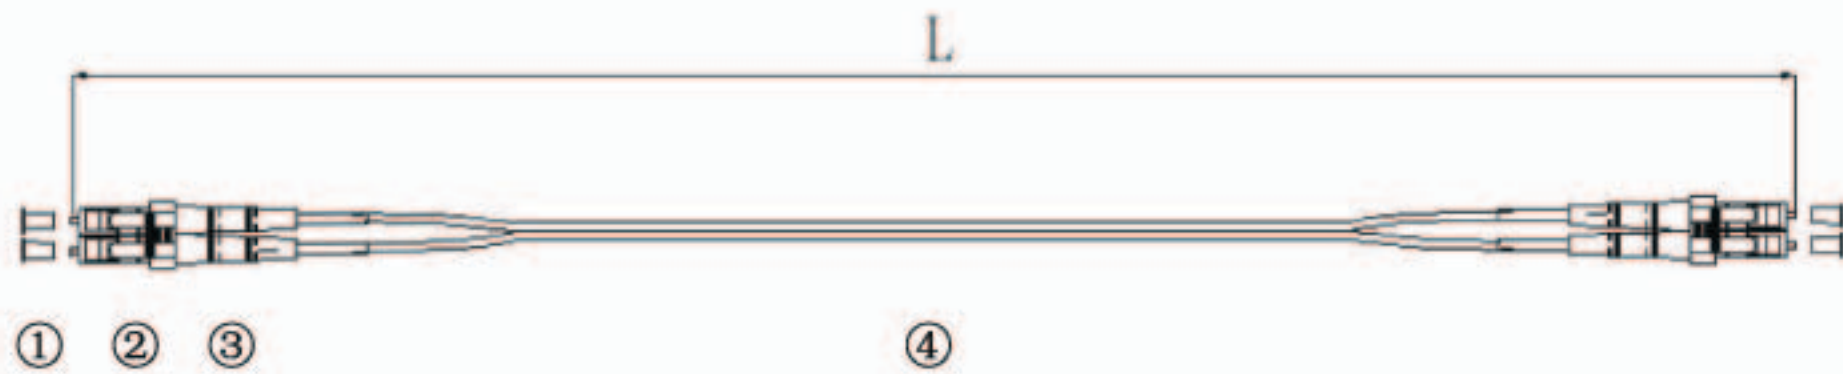

Features

- Standard: Telcordia GR-326-CORE
- PC polishing
- Multi monde fiber, ITU-TG.651
- Standard housing, ceramic ferrule
- Cable diameter: 2.0x4.1 or 2.8x5.7(mm)
- Fiber type: 62.5/125μm
- Insertion loss: MM Less than 0.3dB
- Return loss: PC MM larger than 35dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -40°C ~ 80°C
- Storage temperature range: -40°C ~ 80°C
- Tensile strength: 100N
- Min. bending radius: 35mm
- RoHS compliance

| No. | Description | Qty |
|-----|---------------|-----|
| ① | T cap | 4 |
| ② | Clip | 2 |
| ③ | Boot | 4 |
| ④ | Optical Cable | 1 |

| | | | | | | | | | |
|--------|----------|------------------|------|----|------|-----|---|--|--|
| UNIT | mm | PN: XXM-LC/LC-MD | | | | | | | |
| DATE | 03/27/12 | | | | | | | | |
| DRAW | | | | | | | | | |
| CHECK | | | | | | | | | |
| APP. D | | SOLE | SIZE | A4 | PAGE | REV | A | | |