


REV	Content of Amendment	Update

RoHS

Fiber Optical Patch Cord, MTJR-ST,MM 62.5 Duplex,PVC or LSZH, OD= 2.0×4.1 or 2.8×5.7(mm)

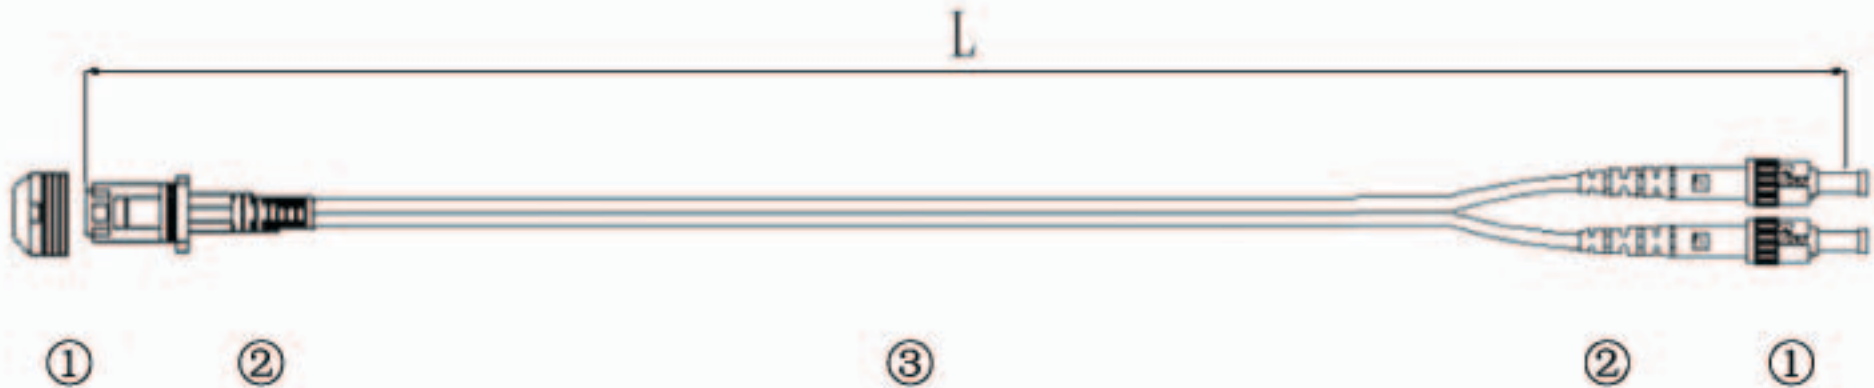

**Features**

- Standard: Telcordia GR-326-CORE
- PC polishing
- Multi monde fiber, ITU-TG.651
- Standard housing, ceramic ferrule
- Cable diameter: 2.0×4.1 or 2.8×5.7(mm)
- Fiber type: 62.5/125μm
- Insertion loss: MM Less than 0.3dB
- Return loss: PC MM larger than 35dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -40°c ~ 80°c
- Storage temperature range: -40°c ~ 80°c
- Tensile strength: 100N
- Min. bending radius: 35mm
- RoHS compliance

No.	Description	Qty
①	Cap	3
②	Boot	3
③	Optical Cable	1

UNIT	mm	PN: XXM-MTRJ/ST-MD					
DATE	03/27/12						
DRAW							
CHECK							
APP, D		SCALE	SIZE	A4	PAGE	REV	A