


REV	Content of Amendment	Update

RoHS

Fiber Optical Patch Cord, LC-LC, MM 50,Duplex, PVC or LSZH, OD= 2.0x4.1 or 2.8x5.7(mm)

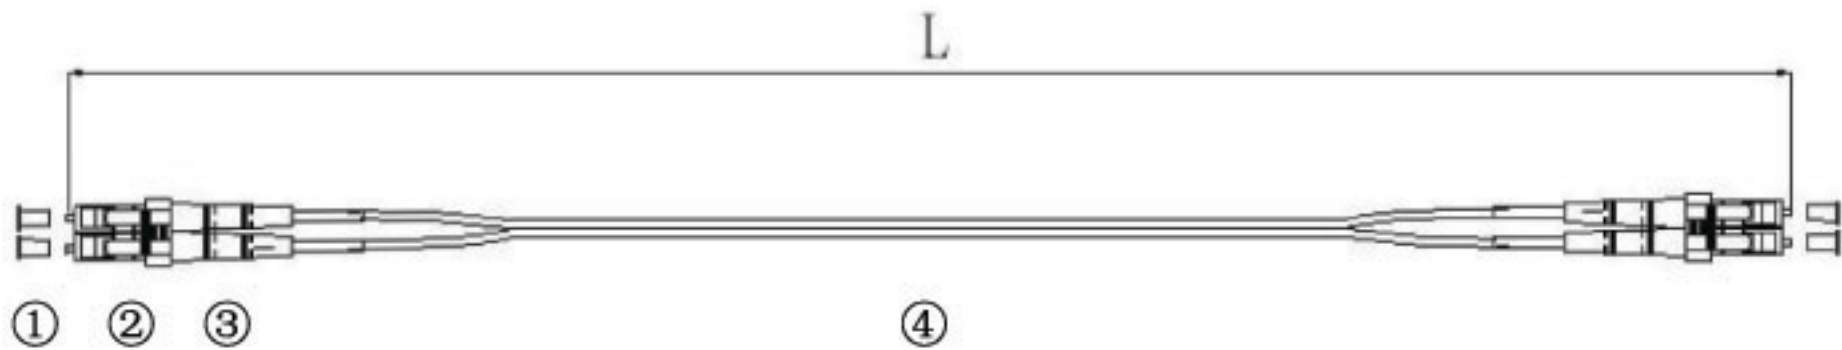

**Features**

- Standard: Telcordia GR-326-CORE
- PC polishing
- Multi monde fiber, ITU-TG.651
- Standard housing, ceramic ferrule
- Cable diameter: 2.0x4.1 or 2.8x5.7(mm)
- Fiber type: 50/125 $\mu$ m
- Insertion loss: MM Less than 0.3dB
- Return loss: PC MM larger than 35dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -40 $^{\circ}$ c ~ 80 $^{\circ}$ c
- Storage temperature range: -40 $^{\circ}$ c ~ 80 $^{\circ}$ c
- Tensile strength: 100N
- Min. bending radius: 35mm
- RoHS compliance

No.	Description	Qty
①	T cap	4
②	Clip	2
③	Boot	4
④	Optical Cable	1

UNIT	mm	PN: XXM-LC/LC-MD5				
DATE	03/27/12					
DRAW						
CHECK						
APP, D		SOLE	SIZE	A4	PAGE	REV A