


REV	A	B	C	D	E	F	G
	Content of Amendment	Update					RoHS


Fiber Optical Patch Cord, SC-ST, OM3 Duplex, PVC or LSZH, OD=2.0x4.1 or 2.8x5.7(mm)

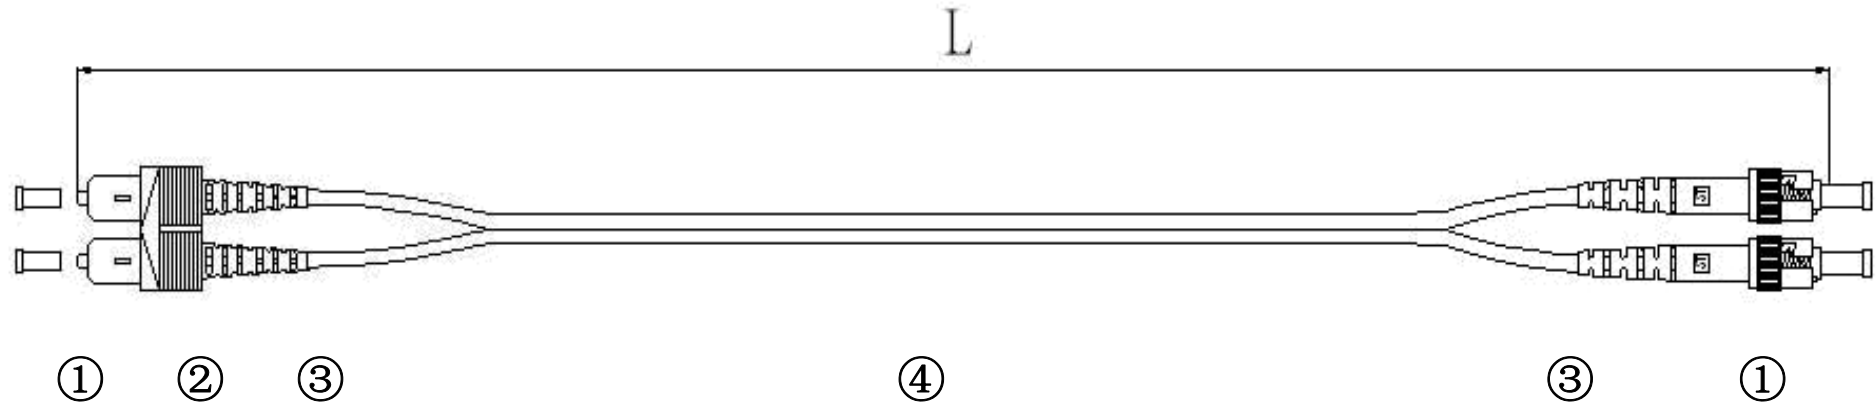

Features

- Standard: Telcordia GR-326-CORE
- PC polishing
- Multi monde fiber, ITU-TG.651
- Standard housing, ceramic ferrule
- Cable diameter: 2.0x4.1 or 2.8x5.7(mm)
- Fiber type: 10GB 50/125 μm
- Insertion loss: MM Less than 0.3dB
- Return loss: PC MM larger than 35dB
- Repeatability: Less than 0.2 dB
- Changeability: Less than 0.1 dB
- Operating temperature range: -40°C ~ 80°C
- Storage temperature range: -40°C ~ 80°C
- Tensile strength: 100N
- Min. bending radius: 35mm
- RoHS compliance

No.	Description	Qty
①	T cap	4
②	Clip	1
③	Boot	4
④	Optical Cable	1

UNIT	mm	PN: XXM-SC/ST-LO					
DATE	03/27/12	 TTI Cable					
DRAW							
CHECK							
APP, D							
		SCQLE	SIZE	A4	PAGE	REV	A