REV	Content of Amendment	Update

RoHS

Fiber Optical Patch Cord,LC-ST,OM3 Duplex,PVC or LSZH,OD= 2.0x4.1 or **2.8**×5.7(mm)

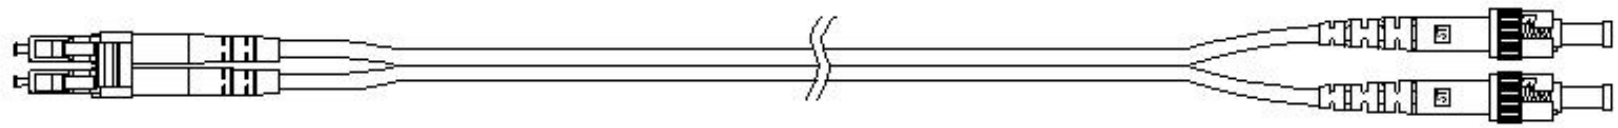

① ② ③ ④

Features

Standard: Telcordia GR-326-CORE
PC polishing
Multi monde fiber, ITU-TG.651
Standard housing, ceramic ferrule
Cable diameter: 2.0×4.1 or 2.8x5.7(mm)
Fiber type: 10GB 50/125 μm
Insertion loss: MM Less than 0.3dB
Return loss: PC MM larger than 35dB
Repeatability: Less than 0.2 dB
Changeability: Less than 0.1 dB
Operating temperature range: -40°c ~ 80°c
Storage temperature range: -40°c ~ 80°c
Tensile strength: 100N
Min. bending radius: 35mm
RoHS compliance

No.	Description	Qty
①	T cap	4
②	Clip	1
③	Boot	4
④	Optical Cable	1

UNIT	mm	PN: XXM-LC/ST-LO					
DATE	03/27/12	TTI CABLE	TTI Cable				
DRAW							
CHECK							
APP, D		SCQLE		SIZE	A4	PAGE	REV A