

The Cat6A/10-Gig Termination Solution!

The next generation in our 10Gig Termination System combines two crimpers into a single tool, making 2-step crimping simple. First, insert the connector into the front end to terminate the contacts and switch to the back end to crimp the external ground.

Like the original, the new Tele-TitanXg 2.0, along with our 10-gig shielded connectors, are engineered specifically for Cat6A cables to provide true 10Gig performance each and every time.

- One tool does the job of two tools
- Improve efficiencies by not having to change out tools in the middle of your termination
- Straight action crimp achieved with minimal hand force
- Compact and rugged design
- Terminates to industry specified crimp heights
- Gun-style lock for secure closure
- Non-slip handle and finger grooves for comfortable grip and control
- *Not to be used on standard RJ45 modular plugs*




Tele-TitanXg 2.0 Crimp Tool
P/N 12516

Step 1

Insert connector and terminate contacts

RJ12/11 Cavity
RJ45 Cavity

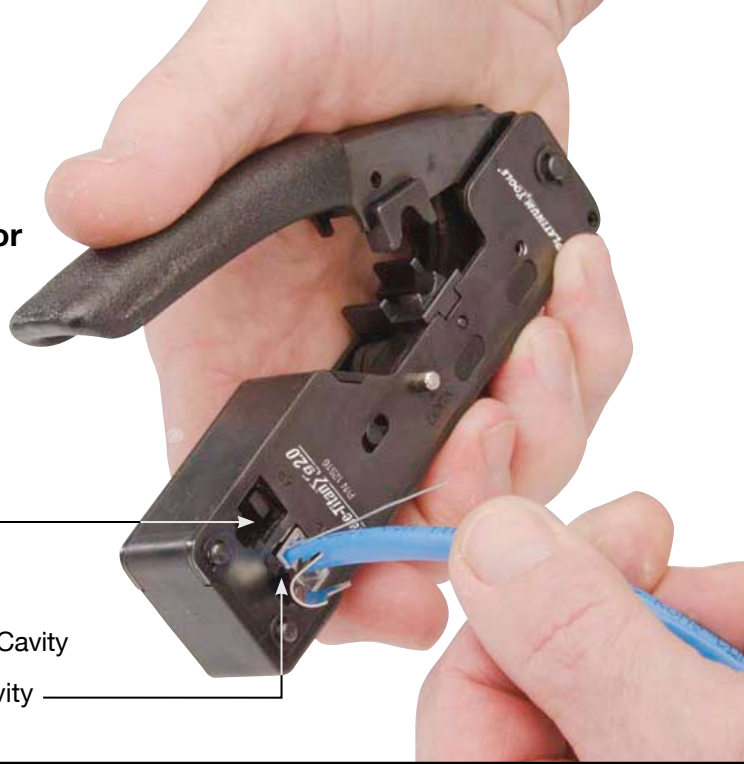

Specs:

- S45C carbon steel frame
- Rust resistant black oxide finish

Applications:

- RJ45 Cat6A/10Gig Shielded RJ45 connectors
- Cat6E, Cat6A, Cat7 & over-sized Cat5e/6 industrial Ethernet cables
- RJ12/11 connectors



Technical Data

- Length: 5.325" (135mm)
- Weight: 10.5oz (296g)

Step 2

Crimp external ground

External Ground Crimp

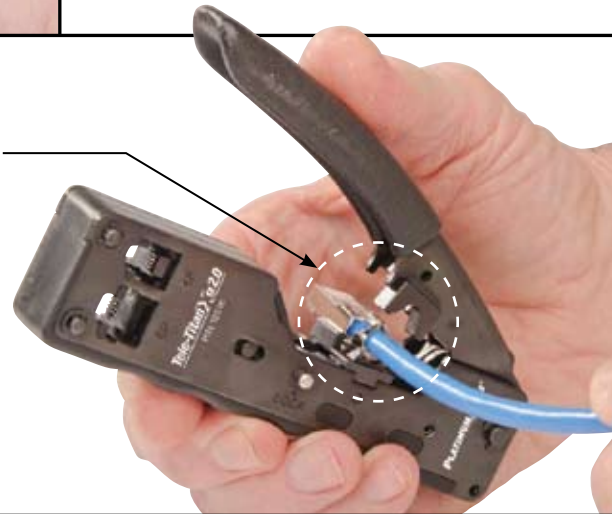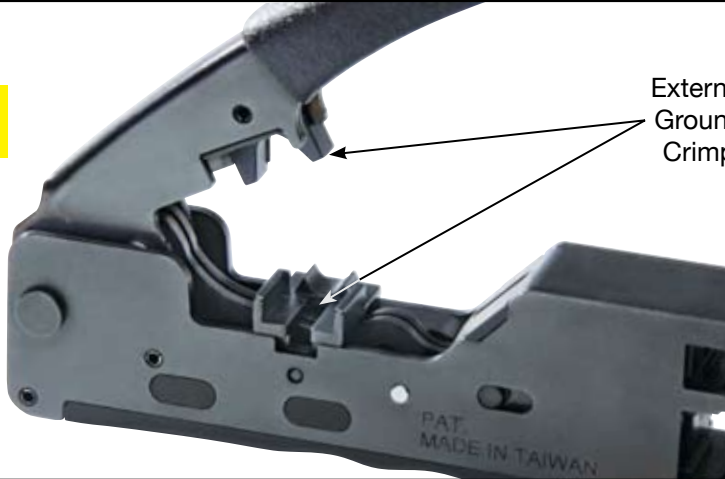

Ordering Information

| Description | Pkg |
|--|--------------|
| Tele-Titan XG 2.0 – Cat6A/10Gig Crimp Tool | Box |
| Tele-Titan XG 2.0 Cat6A/10Gig Combo 10-Pack | Clamshell |
| RJ-45 Cat6A 10Gig Shielded Connector w/Liner | Bulk/100/Bag |
| RJ-45 Cat6A 10Gig Shielded Connector w/Liner | 25/Bag |
| RJ-45 Cat6A 10Gig Shielded Connector w/Liner | 50/Bag |
| RJ-45 Cat6A 10Gig Shielded Connector w/Liner | 50/Clamshell |
| RJ-45 Cat6A 10Gig Shielded Connector w/Liner | 10/Clamshell |
| Spare Liners for 10Gig Connectors | 50/Bag |

NOTE: Liners are included with RJ45 Cat6A 10-Gig shielded connectors.

RJ45 Cat6A/10-Gig Shielded Connectors:

- Exceeds 10-Gig performance standard
- UL and RoHS compliant
- Max cable OD: 0.335"/8.5mm
- Max conductor OD: 0.053"/1.35mm

