

ABA Industry, Inc.

Specification for Approval

Product Part Number

- TAM2404E01XX

Product Description

- F/UTP, 24AWG stranded bare copper, CAT.5E, CM
- Overall metal foil screen with drain wire

Product Features

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 350 MHz.


Application

- Structure cabling for patch cable.
- Transmission of digital and analogue for data, video and audio applications.
- Overall metal shielded providing good protection from EMI noise.
- IEEE 802.3u 100BASE-T and legacy speeds.
- CDDI / ATM / Token Ring
- IEEE 802.3af (PoE) / IEEE 802.3at (PoE+)

Applicable Standard

- Electrical Transmission
 - ANSI/TIA-568-C.2 (2009)
 - ISO/IEC 11801 (Edition 2.2)
 - IEC 61156-5 (Edition 2.0)
- Flame Test
 - UL 1685 (CM)
- Material and Construction
 - UL 444
 - CSA 22.2 NO.214
- EU Directive 2011/65/EC (RoHS2)
- EU Directive 2006/95/EC (LVD)
- CE compliance date: 2010.01.01

Sectional Drawing

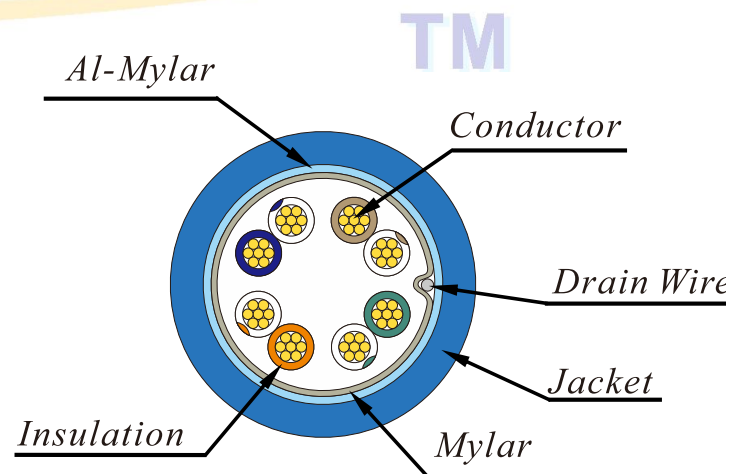

Establish Date	2014.03.01	Edition	1.1	Revised Date	2014.10.13
----------------	------------	---------	-----	--------------	------------

ABA Industry, Inc.
639 EAST WALNUT STREET
CARSON, CA 90746
NEW TELEPHONE # 310-327-7670
NEW FAX # 310-808-0778
TOLL FREE 888-534-7776

ABA Industry, Inc.

Specification for Approval

Material and Construction

Conductor	Material	24AWG 7/33 stranded bare copper	
Insulation	Material	Polyolefin (PO)	
	Color code & diameter	Blue & white/blue Stripe	1.06 ± 0.02 mm
		Orange & white/orange stripe	1.04 ± 0.02 mm
		Green & white/green stripe	1.06 ± 0.02 mm
Brown & white/brown stripe		1.04 ± 0.02 mm	
Twisted	Description	Left hand direction	
Assembly	Description	Left hand direction	
Shield	Material	Mylar tape	
Drain wire	Material	26AWG 7/35 stranded tinned copper	
Shield	Material	Al Mylar tape	
	Description	100 % coverage and mylar side facing out	
Jacket	Material	Flame retardant polyvinyl chloride (FRPVC)	
	Diameter	5.7 ± 0.2 mm	
	Thickness	0.50 ± 0.05 mm	
	Color	Per customer's request	
Marking	ELITE 350 CAT 5E GIGASYSTEM TESTED TO 350MHz---E142890 FTP 4PR 24AWG 75°C C(UL)US CM---3P VERIFIED TO TIA-568-C.2 mmyy ¹ RoHS COMPLIANT PATCH CABLE Note 1: mmyy is date code.		

Usage & Environmental Condition

Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	-20°C to 60°C
Minimum bending radius	≥ 4 times of overall diameter	
Maximum pulling tension	≤ 110 N	

ABA Industry, Inc.

Specification for Approval

Physical & Electrical Characteristics (at 20°C)

Temperature & voltage rating	75°C / 300V
Spark test	2.5 KV DC
AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 14.0 Ω/100m
Resistance unbalance	≤ 5%
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ · m
Mutual capacitance	≤ 5.6 nF/100m
Capacitance unbalance pair-to-ground	≤ 330 pF/100m

Transmission Performance (at 20°C)

Frequency (MHz)	IL	NEXT	PS.NEXT	ACR	PS.ACR	ACRF	PS.ACRF	RL	Propagation Delay	Delay Skew
	Max. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Max. ns/100m	Max. ns/100m
1	2.45	68.30	65.30	65.85	62.85	66.80	63.80	20.00	570.00	45.00
4	4.86	59.27	56.27	54.41	51.41	54.76	51.76	23.01	552.00	
8	6.92	54.75	51.75	47.84	44.84	48.74	45.74	24.52	546.73	
10	7.76	53.30	50.30	45.54	42.54	46.80	43.80	25.00	545.38	
16	9.90	50.24	47.24	40.34	37.34	42.72	39.72	25.00	543.00	
20	11.12	48.78	45.78	37.66	34.66	40.78	37.78	25.00	542.05	
25	12.50	47.33	44.33	34.83	31.83	38.84	35.84	24.17	541.20	
31.25	14.07	45.88	42.88	31.81	28.81	36.90	33.90	23.33	540.44	
62.5	20.39	41.36	38.36	20.97	17.97	30.88	27.88	20.74	538.55	
100	26.37	38.30	35.30	11.93	8.93	26.80	23.80	18.99	537.60	
150	33.05	35.66	32.66	N.A.	N.A.	23.28	20.28	17.47	536.94	
200	38.91	33.78	30.78	N.A.	N.A.	20.78	17.78	16.40	536.55	
250	44.22	32.33	29.33	N.A.	N.A.	18.84	15.84	15.57	536.28	
300	49.17	31.14	28.14	N.A.	N.A.	17.26	14.26	14.89	536.08	
350	53.82	30.14	27.14	N.A.	N.A.	15.92	12.92	14.31	535.92	

Values above 100MHz are for information only.

ABA Industry, Inc.

Specification for Approval

Shipping Information


Item	Dimension	Nominal net weight
Cable	305 m	11.30 kg (24.91 lb)
Plywood reel	D320 x d150 x H250 x h230 mm	1.25 kg
Pallet	1150 x1150 x120 mm	14.1 kg

Container type	Capacity of pallet	Capacity of reel
20 feet	20	720
40 feet	40	1440

Shipping could use standard delivery form or per customer`s request.


Schematic Drawing of Reel & Package

Fumigated plywood reel.




Schematic Drawing of Package

Each package of pallet delivered with plastic wrap and packing strap.

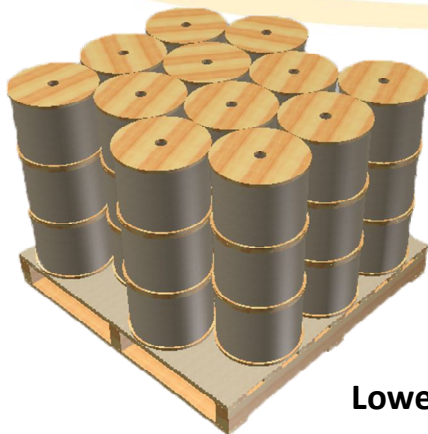

Lower Pallet

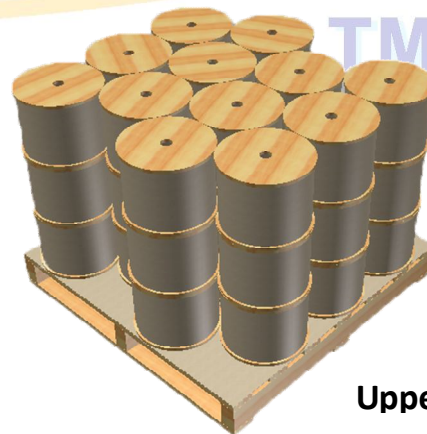

Upper Pallet

Revised Information

Edition	Revised Description	Revised Date
1.1	Revised transmission performance table. Enhanced the criteria limit.	2014.10.13