

NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
1.0	2021/4/28	Darrick	Change wire and lable


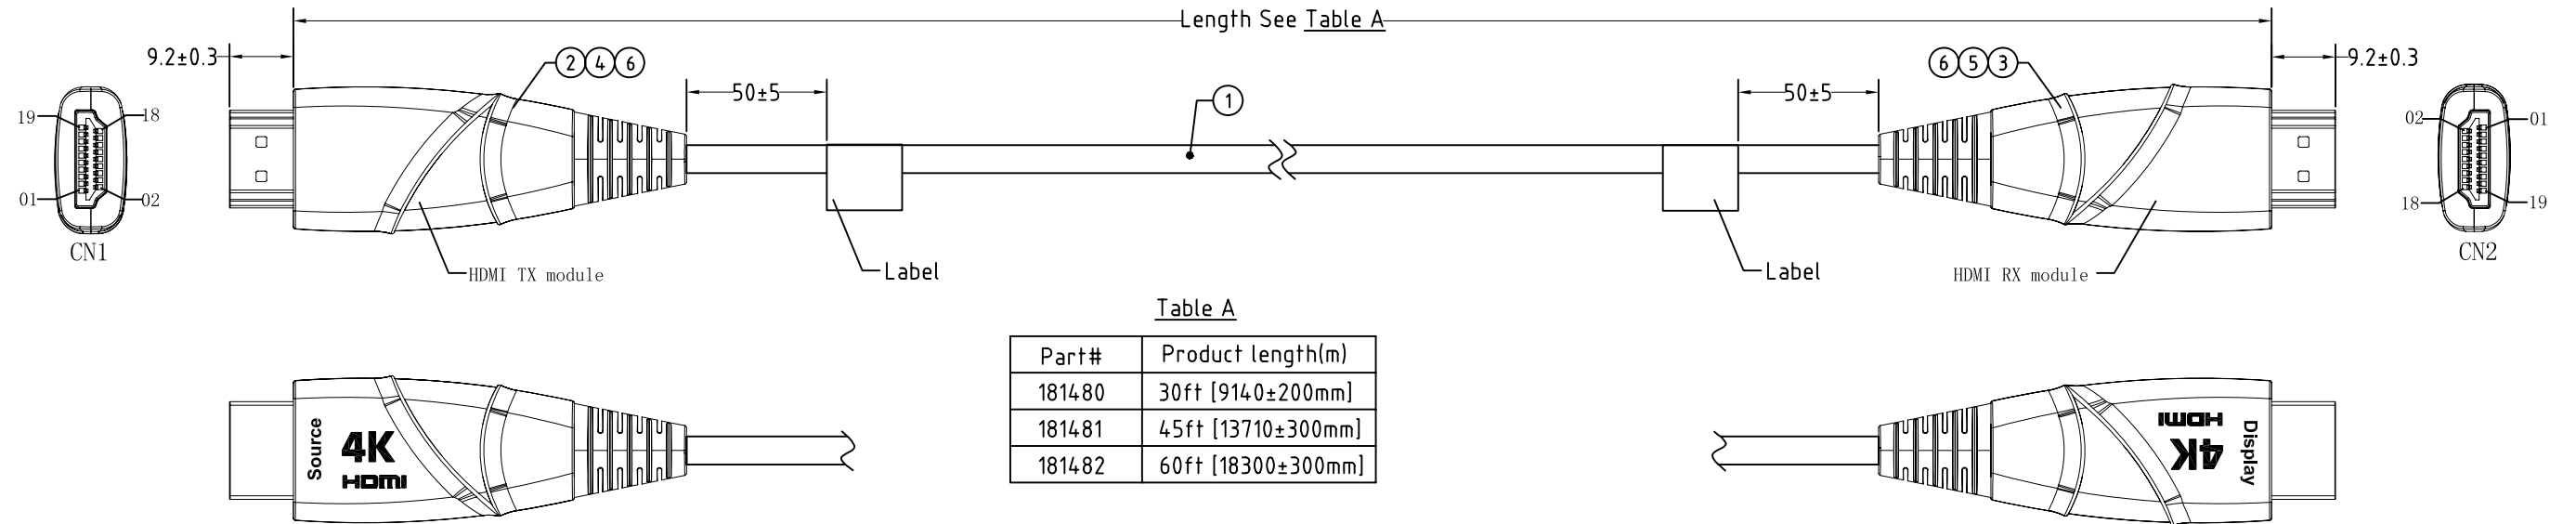



Table A

Part#	Product length(m)
181480	30ft [9140±200mm]
181481	45ft [13710±300mm]
181482	60ft [18300±300mm]


Label:
Size:40×20mm

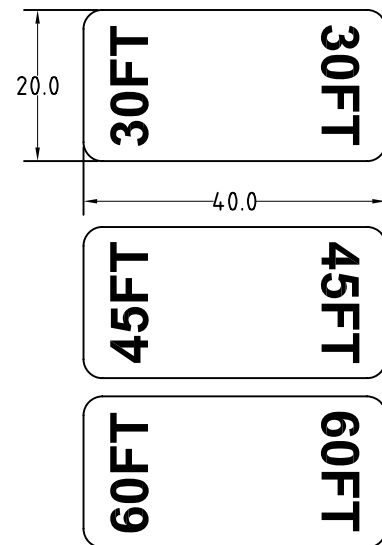

Wire Details

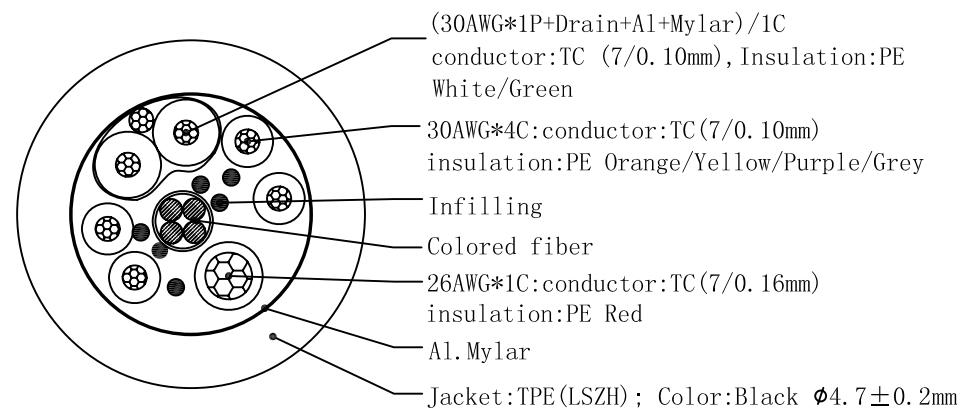

PIN ASSIGNMENT

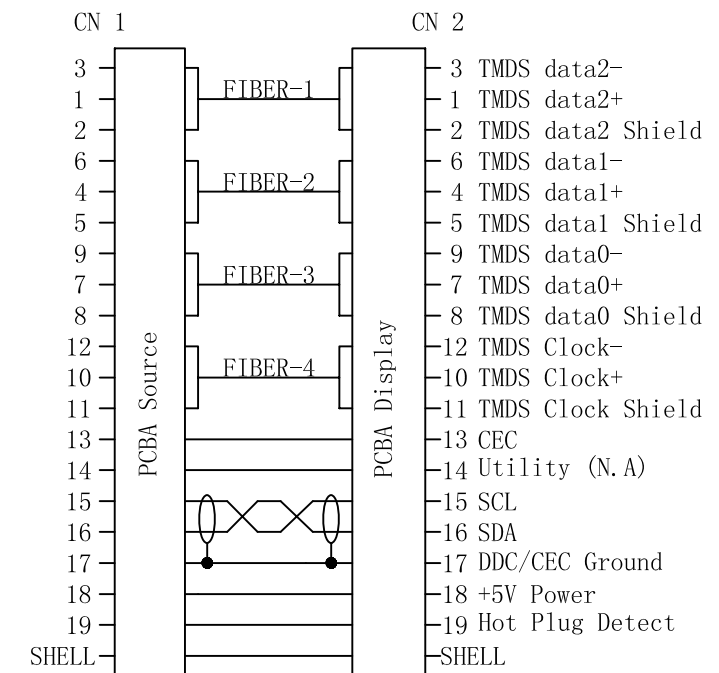

- NOTE:
 1. ELECTRICAL TEST:(100% real machine transmission test)
 (1).SOUCE "meets HDMI TX module, stands for firing."
 (2).Display "meets HDMI RX module, stands for receive."
 (3). 100% by 2160P(3840*2160 60HZ)4:4:4(YCBCR)
 (4). Support HDCP2. 2;ARC, 3D;
 (5). Maximum transmission bandwidth 18Gbps
 2. RoHS+REACH Compliant;

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①	Cable	(Fiber x 4C)*1C+(30#TA*1P+D+A)*1C+30#TA*4C+26#TA*1C+F+A OD4.7mm		
②	HDMI_Conn	HDMI AM TX transmitter module, HDMI gold-plated copper plated connector terminal with pad PCB		
③	HDMI_Conn	HDMI AM RX receiver module, HDMI gold-plated copper plated connector terminal with pad PCB		
④	Shell	HDMI AM upper and lower zinc alloy shell, radium carving, "HDMI", "4K", "Source"		
⑤	Shell	HDMI AM upper and lower zinc alloy shell, radium carving, "HDMI", "4K", "Display"		
⑥	SR-Mold	PVC,Black		

Unless specified on the drawing, tolerances are per the follows:

.	+1
.x	+0.2
.xx	+0.05

DRAWN BY	DATE: 2021/4/28	DESCRIPTION: HAMI 2.0 AOC M-M Cable
CHECKED BY	SHEET 1 of 2	ITEM NO. 181480~181482
APPROVED BY	SCALE None	REV. 1.0 UNIT:mm